

12 Cup Dual-Voltage Automatic Coffee Brewer with 3 Warmers

Features

Dual-Voltage Automatic Coffee Brewer

- Brews 3.8 to 7.5 (14.4 to 28.4 litres) gallons of perfect coffee per hour.
- Model is space-saving 8.5" (21.6 cm) wide.
- All stainless steel construction.
- Hot water faucet and pourover feature on all models.
- SplashGard® funnel deflects hot liquids away from the hand.

**Dual voltage adaptable, can operate at 120V/15amp or 208-240V/20amp.*



Model CWTF-DV

(2 top warmers)

(decanters sold separately)

Dimensions: 18.9" H x 8.5" W x 17.8" D
(48cm H x 21.6cm W x 45.2cm D)



Model CWTF-DV

(3 lower warmers)

(decanters sold separately)

Dimensions: 17" H x 16.5" W x 17.7" D
(43.2cm H x 41.9cm W x 45cm D)

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQ-17-TL

Product No. : 30200.1000

Dimensions:

12⁷/₁₆" H x 2¹/₂" W x 3" D
31.6 cm H x 6.35 cm W x 7.62 cm D



Paper Filter Pack

Product No. : 20115.0000

Packed per case: 1,000

Dimensions: 4¹/₄" Base x 2³/₄" Sidewall
10.8 cm Base x 6.98 cm Sidewall



1GPR SS Portable Server on an RWS1 Warmer

1GPR Product No. : 12487.0001*

RWS1 Product No. : 12203.0010

**Also available with side handles or black decor.*



Easy Clear® ED-17-TL

Product No. : 30201.1001

Dimensions: 8¹/₄" H x 2⁵/₁₆" Dia.

20.95 cm H x 5.87 cm Dia.

Easy Pour® black decanter

Product No. : 06100.0101

Quantity: 1 (also packaged in quantities of 2, 3, 6, 12, & 24)



Easy Pour® orange decanter (for decaf)

Product No. : 06101.0101

Quantity: 1 (also packaged in quantities of 2, 3, 6, 12, & 24)



Model

CWTF-DV

Agency Listing



Dimensions & Specifications

| Model | Product # | Volts | Amps | Tank Heater Watts | Total Watts | Brewing Capacity | Cu. Ft. | Shipping Weight | Cord Attached |
|---------------------------|------------|----------|------|-------------------|-------------|------------------|---------|-----------------|---------------|
| CWTF-DV | 12950.0410 | 120 | 13.9 | 1320 | 1670 | 3.8 gal./hr. | 4.0 | 35 lbs. | No |
| (2 upper, 1 lower warmer) | | 120/208* | 13.9 | 2288 | 2650 | 6.5 gal./hr. | 4.0 | 35 lbs. | |
| | | 120/240* | 15.6 | 3046 | 3400 | 7.5 gal./hr. | 4.0 | 35 lbs. | |
| CWTF-DV | 12950.0409 | 120 | 13.9 | 1320 | 1670 | 3.8 gal./hr. | 6.7 | 39 lbs. | No |
| (3 lower warmers) | | 120/208* | 13.9 | 2288 | 2640 | 6.5 gal./hr. | 6.7 | 39 lbs. | |
| | | 120/240* | 15.6 | 3046 | 3400 | 7.5 gal./hr. | 6.7 | 39 lbs. | |


*120/208-240V, 13.9-15.6A, 2640-3400W. "Factory wired" products utilize same product numbers on dataplate to calculate tank heater range.

Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Electrical: If wired for 120V, requires 2-wires plus ground service rated 120V, single phase, 60 Hz.

If wired for 120/208V or 120/240V, requires 3-wires plus ground service rated 120/208V or 120/240V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" male flare fitting.

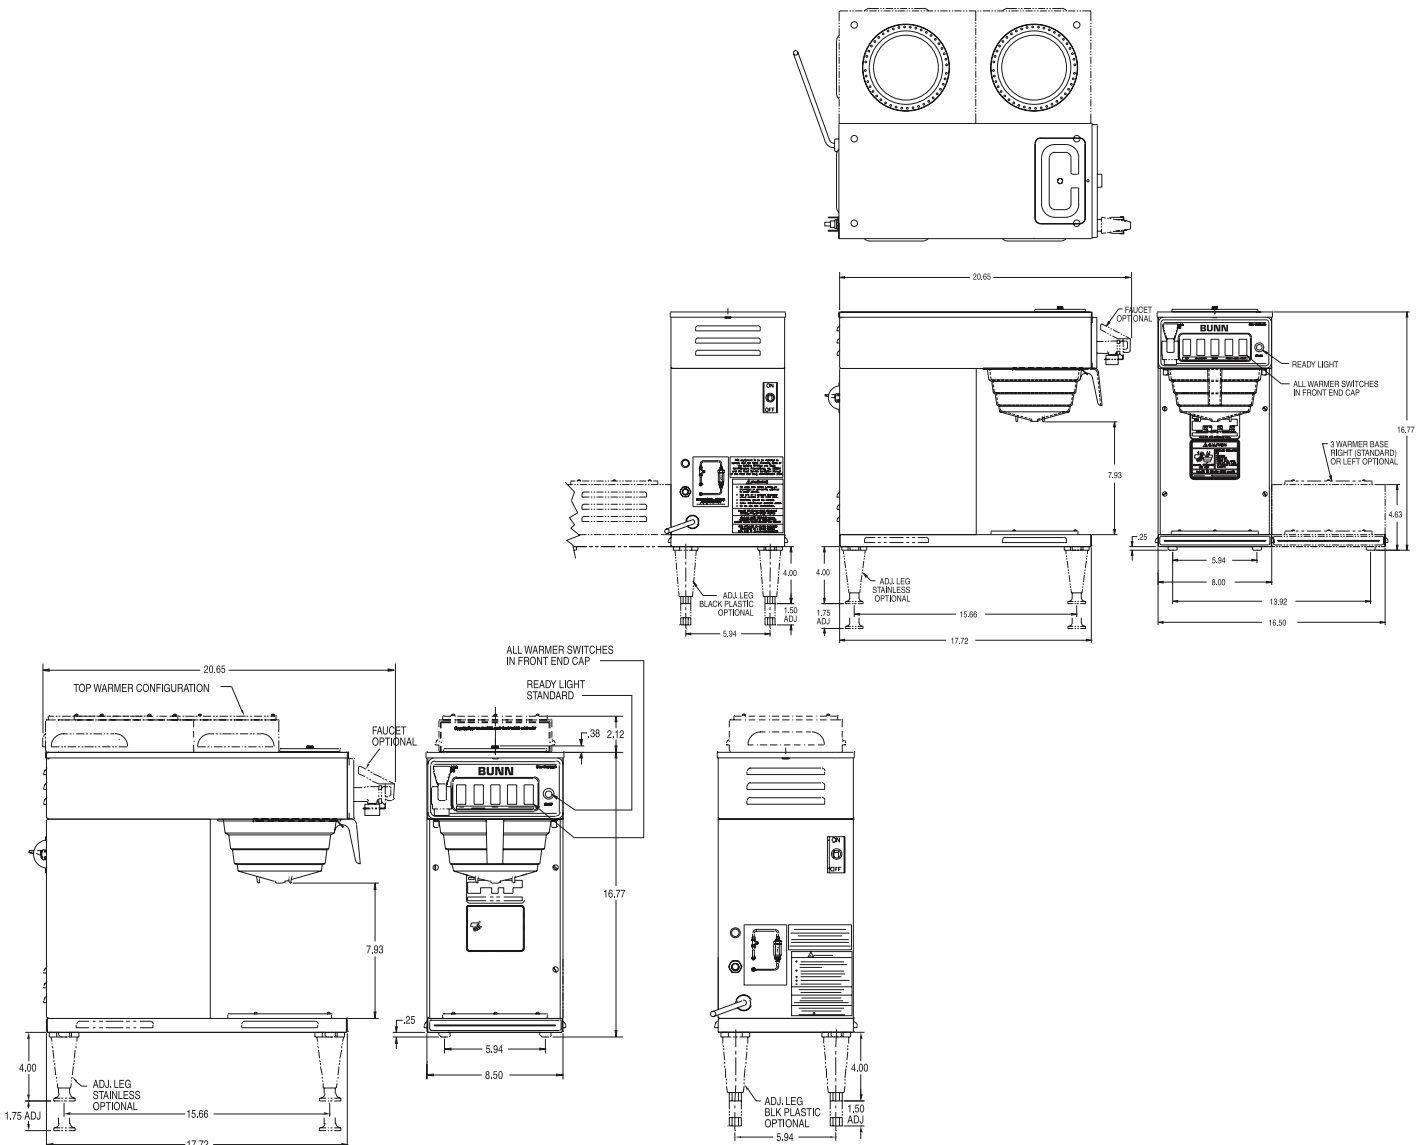

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.